

ADDENDUM NO. 1

JACKSON POINT SUBDIVISION SEWER
IMPROVEMENTS
EDINBURG, TEXAS
BID NO. 2014-99
CDBG GRANT NO. B-13-MC-48-0503
JUNE 10, 2014

SEALED BIDS TO BE RECEIVED AND OPENED AT 3:00 PM CENTRAL TIME ON
MONDAY, JUNE 16, 2014

The following clarifications, corrections, additions and directives shall become part of the Proposal, Contract Documents and Specifications for the **JACKSON POINT SUBDIVISION SEWER IMPROVEMENTS, BID NO. 2014-99**

1. Clarification: The proposed sanitary sewer line shall be **8-inch diameter** instead of 10-inch as shown on **PLAN SHEET 102**. Please make a note of this change on the PLANS.
2. Information Only: Below is a summary of the Geotechnical Report Findings for soil tests conducted on the project site. The information given below is provided to the Bidders as "information only" and will not relieve the Bidder to conduct his own investigations as he wishes. The trench excavation still remains "unclassified".

Field Findings

Depth below grade

Material

0' to 2'
moist

(CL) sandy lean CLAY, d. brown to brown, stiff to very stiff,

2' to 6'

(CL) CLAY, brown, stiff to hard, moist

6' to 10'

(CH) fat CLAY, brown, very stiff to hard, moist

10' to 20'

(CL) CLAY, brown, very stiff, moist

The water table was not encountered during the drilling operations. We do not expect for groundwater to be encountered during utility excavation operations. The soil samples were all moist with no wet conditions encountered, being that there was not sandy soils found at this project site outside of the surface soil any water intrusion if encountered will occur during extended periods of the excavation being open. We have

also drilled two other projects in the past month near this project and neither had water as well.

General Observations

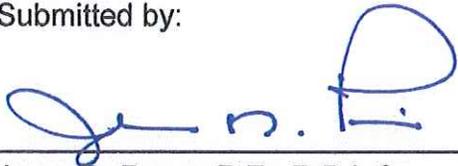
Asphaltic Pavement having a thickness of 1 ½" at the North location and 1 ¾" at the South Location.

Flexible Base (Caliche) having a thickness of 6" at the North location and 9" at the South Location.

PLEASE MAKE THE CORRECTIONS TO THE "CONTRACT DOCUMENTS, PLANS AND SPECIFICATIONS" DOCUMENT(S) AS APPROPRIATE.

Please acknowledge receipt of this addendum on the space provided in the Proposal Section of the Documents, Page C-4.


Submitted by:

 6/10/14

Jorge D. Perez, P.E., R.P.L.S.
PCE - Project Engineer

Date

Approved by:

 06/10/14

Lorena Fuentes, Purchasing Agent
City of Edinburg

Date